

# Advanced Model


GT27

PRODUCT FLYER



GT27 offers high capacity data processing, ensuring smooth screen operation even when multiple tasks such as, logging, script, alarm, or device data transfer are running. In addition, image recording, image playback, video image input, and RGB output are available\*. All functions of GOT2000 can be used on GT27 models. Tablet like gesture function is also included as standard.


\*Excluding GT2705.

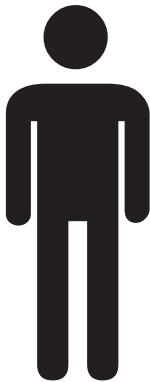

### Human Sensor Function


Tablet like gesture functionality. Temperature sensor automatically detects an operator approaching the unit and displays the screen.

\*12.1" and 15" versions only.

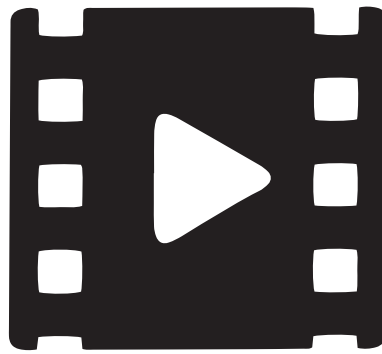

### Video Images

GOT acts as a monitor to display images which are recorded by a video camera or saved in a personal computer. There is no need to have additional monitors.

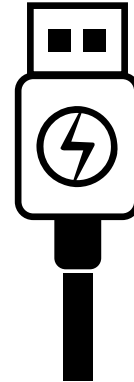

### USB Interface: Device & Host

Connect to a personal computer and transfer data with mini USB port. Transfer project data or read the data to or from the GOT using the USB memory. A USB mouse, keyboard, barcode reader, or RFID reader can also be connected.

## Features

- » GT Works3 user-friendly programming software
- » Video display function
- » Multi-touch/gesture control
- » Debugging functions
- » Multimedia function (excluding GT2705)
- » Document display
- » VNC remote access
- » GOT mobile – webserver function

# SPECIFICATIONS

Specifications		GT2705-VTBD-GF	GT2708-STBA-GF GT2708-STBD-GF	GT2708-VTBA-GF GT2708-VTBD-GF	GT2710-STBA-GF GT2710-STBD-GF	GT2710-VTBA-GF GT2710-VTBD-GF GT2710-VTWA-GF GT2710-VTWD-GF	GT2712-STBA-GF GT2712-STBD-GF GT2712-STWA-GF GT2712-STWD-GF	GT2715-VTBA-GF GT2715-VTBD-GF
Display unit	Type	5.7", TFT, LCD, 65536 colours	8.4", TFT, LCD, 65536 colours		10.4", TFT, LCD, 65536 colours		12.1", TFT, LCD, 65536 colours	15", TFT, LCD, 65536 colours
	Resolution (pixel)	640 x 480	800 x 600	640 x 480	800 x 600	640 x 480	800 x 600	1024 x 768
Power supply	A types	-	100 - 240 V AC					
	D types	24 V DC						
Memory capacity	(ROM)	32 MB	57 MB					
	(RAM)	80 MB	128 MB					
Memory card		1 (SD memory card)						
Keyboard type		Touch-panel						
Function keys		Touch keys						
LED indicators		1 (power)						
Interfaces		Ethernet (TCP/IP), RS232, RS422/485, USB, SD card slot						
Multimedia capability		-	Optional					
Real-time clock		Integrated						
Network communication		Ethernet (TCP/IP), CC-Link (IE), Modbus®, RS232, RS422/485, A bus, Q bus, MELSECNET/10/H						
	-GF types include	CC-Link IE field network communication unit GT15-J71GF13-T2						
Extension interface (communication/ option unit)		1 port (max. 3 units/4 channels)						
IP rating (front)		IP67*						
Dimensions (WxHxD)	mm	167 x 139 x 60	241 x 194 x 52		303 x 218 x 52		316 x 246 x 52	397 x 300 x 60
Weight	kg	1.0	1.5		2.1		2.4	4.5

## Notes:

White frame models without front USB.

\*The unit may not be used in certain environments where it is subjected to splashing oil or chemicals for a long period of time or soaked in oil mist.

Accessories: Programming software GT Works3, cables and interface adapters.

## Catalogue

<https://bit.ly/GOT-Series>

## e-Learning

<https://www.mitsubishielectric.com/fa/assist/e-learning/eng.html>

For further information contact



Email: [iasw@meaust.meap.com](mailto:iasw@meaust.meap.com)  
Website: [MitsubishiElectric.com.au](http://MitsubishiElectric.com.au)