



**MITSUBISHI
ELECTRIC**

MULTIMEDIA DATA/VIDEO PROJECTORS

Changes for the Better



Entry level projectors, high level performance.



Mobile XGA

XD211U

New DLP® chip, high brightness and weighs less than 3kgs

The XD211U and SD210U combine the features of an advanced DLP® (Digital Light Processing) chip, a newly developed optical engine and a high-efficiency light source lamp to produce incredible pictures with rich and vibrant colours. Additionally with their compact and lightweight design, the XD211U and SD210U allow you easy portability and quick setup for dynamic presentations on the go.

Detachable Keypad

The keypad* can be removed from the projector to be used as a remote control. Since the keypad is used to control the projector, detaching it also doubles as a key-lock function preventing others from making adjustments, while also discouraging theft.

* An extra remote keypad is included with the XD211U/SD210U should the original keypad get lost.



Mobile SVGA

SD210U

Anti-theft Security Hook

An anti-theft security hook* is built into the projector to help prevent theft and any unauthorised removal of the unit.

* Mitsubishi Electric cannot accept responsibility for thefts occurring despite use of this safety feature.

Instant Shutdown

Once your presentation is over, you can simply hit the power button, disconnect the XD211U/SD210U and go off to your next task. Engineered with the instant shutdown feature there is no longer any awkward idle time waiting for the projector to completely power off, which lets the user keep up with their busy presentation schedule.

Easy Setup

Auto Search function displays the connected input sources automatically. Users don't have to get distracted by ensuring the appropriate signal source is manually selected. Also, +/- 20% of vertical keystone correction and 1.2x optical zoom gives users a greater flexibility of positioning.

White Intensity

Users have the flexibility to adjust the light intensity of the whiteness of the colour wheel of up to 11 levels. This allows users to configure the overall brightness and picture parameters tailored to their individual preference.

● Optimum high-contrast picture quality, to brighten up PC images.

1024			1024			1024		
1024	2047	2047	1024	2047	2047	1024	2047	2047
\$35,786	\$32,569	\$38,456	\$35,786	\$32,569	\$38,456	\$35,786	\$32,569	\$38,456
10536	9823	11258	10536	9823	11258	10536	9823	11258
3520	2681	2385	3520	2681	2385	3520	2681	2385
2548	3256	4588	2548	3256	4588	2548	3256	4588
1125	2564	2869	1125	2564	2869	1125	2564	2869
\$28,695	\$29,563	\$30,215	\$28,695	\$29,563	\$30,215	\$28,695	\$29,563	\$30,215
10235	9965	10235	10235	9965	10235	10235	9965	10235
3520	2136	2135	3520	2136	2135	3520	2136	2135
2854	2365	2898	2854	2365	2898	2854	2365	2898
3265	2889	3456	3265	2889	3456	3265	2889	3456

White enhancement 0 White enhancement 5 White enhancement 11

Superior Colour Reproduction

The XD211U and SD210U are equipped with a 5 segment colour wheel (R,G,B,W,Y), BrilliantColor™ technology and a newly designed dynamic lamp power control system to produce superior and more natural colour reproduction.




XD211U (Mobile XGA Projector)

SD210U (Mobile SVGA Projector)

Specifications


Model	XD211U	SD210U
Display Technology	0.55" 1 - Chip DMD	
Resolution	1024 x 768 (Total 786,432 pixels)	800 x 600 (Total 480,000 pixels)
Brightness (Maximum)	2200lm	2000lm
Contrast Ratio	2000 : 1	
Picture Size	40" - 300"	
Source Lamp**	150W (life up to 3000hrs) with Low Mode, 180W (life up to 2000hrs) with Standard Mode	
PC Compatibility	640 x 480 - 1280 x 1024, True : 1024 x 768, Sync on Green available	640 x 480 - 1280 x 1024, True : 800 x 600, Sync on Green available
Video Compatibility	NTSC / NTSC 4.43 / PAL (including PAL - M , N) / SECAM / PAL - 60 Component Video ; 480i/p (525i/p), 576i/p (625i/p), 720p (750p), 1080i (1125i 60Hz), 1080i (1125i 50Hz)	
PC Input Terminals	RGB ; mini D-sub 15pin x 1 Audio ; Stereo mini jack (ø3.5mm) x 1	
Video Input Terminal	RCA x 1 + S-Video x 1	RCA x 1
Output Terminals (XD211U only)	RGB ; mini D-sub 15pin x 1 Audio ; Stereo mini jack (ø3.5mm) x 1	
Communication Terminal	RS-232C x 1	
Audio Speaker	2W Mono	
Dimension (W x H x D)	302 x 105 x 221 mm	
Weight	2.7kg / 6.0lbs	
Power requirements	AC 100 - 240V, 50 / 60Hz	
Optional Lamp	VLT-XD210LP	

Input and Output Terminals

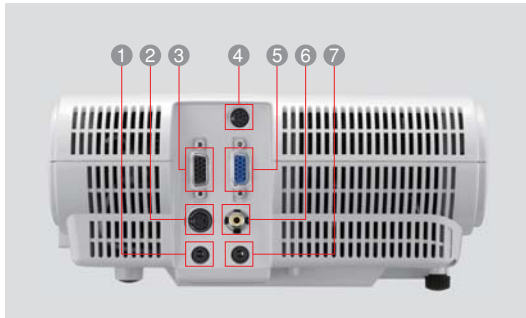


- 1 Audio output (XD211U only)
- 2 S-Video (XD211U only)
- 3 PC/Component Video output (XD211U only)
- 4 Serial RS-232C
- 5 PC/Component Video input (mini D-sub 15pin)
- 6 RCA
- 7 Audio input (stereo mini jack)

Dimensions

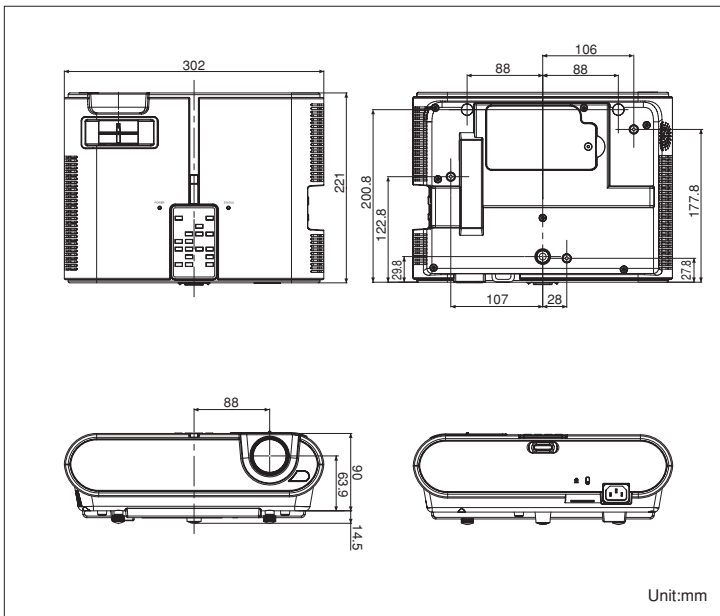

Screen size and Projection distance

As seen from the side

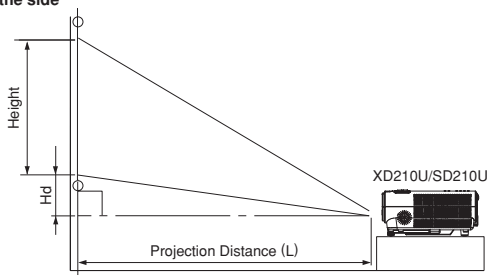

*All brand names and product names are trademarks, registered trademarks or trade names of their respective holders.
**Approximate life based on average operational life cycle.

XD211U Screen size chart (4:3 aspect ratio)

Screen				Distance from screen (L)				Height projected image (Hd)			
Diagonal size		Width (W)	Height (H)	Max. Zoom		Min. Zoom					
inch	cm	inch	cm	inch	m	inch	m	inch	cm		
40	102	32	81	24	61	55	1.4	68	1.7	1.8	5
60	152	48	122	36	91	84	2.1	103	2.6	2.7	7
80	203	64	163	48	122	112	2.8	137	3.5	3.6	9
100	254	80	203	60	152	141	3.6	172	4.4	4.5	11
150	381	120	305	90	229	212	5.4	259	6.6	6.8	17
200	508	160	406	120	305	283	7.2	345	8.8	9.0	23
250	635	200	508	150	381	354	9.0	432	11.0	11.3	29
300	762	240	610	180	457	425	10.8	-	-	13.5	34

The above numbers are approximate, and may be slightly different from the actual measurements.

XD211U Screen size chart (16:9 aspect ratio)

Screen				Distance from screen (L)				Height projected image (Hd)			
Diagonal size		Width (W)	Height (H)	Max. Zoom		Min. Zoom					
inch	cm	inch	cm	inch	m	inch	m	inch	cm		
40	102	35	89	20	50	60	1.5	74	1.9	5.2	13
60	152	52	133	29	75	91	2.3	112	2.8	7.9	20
80	203	70	177	39	100	122	3.1	149	3.8	10.5	27
100	254	87	221	49	125	153	3.9	187	4.8	13.1	33
150	381	131	332	74	187	231	5.9	282	7.2	19.6	50
200	508	174	443	98	249	308	7.8	376	9.6	26.2	66
250	635	218	553	123	311	386	9.8	471	12.0	32.7	83
300	762	261	664	147	374	463	11.8	-	-	39.3	100

The above numbers are approximate, and may be slightly different from the actual measurements.

SD210U Screen size chart (4:3 aspect ratio)

Screen				Distance from screen (L)				Height projected image (Hd)			
Diagonal size		Width (W)	Height (H)	Shortest (Wide)		Longest (Tele)					
inch	cm	inch	cm	inch	m	inch	m	inch	cm		
40	102	32	81	24	61	61	1.5	68	1.7	1.8	5
60	152	48	122	36	91	92	2.3	103	2.6	2.7	7
80	203	64	163	48	122	124	3.1	138	3.5	3.6	9
100	254	80	203	60	152	155	3.9	173	4.4	4.5	11
150	381	120	305	90	229	233	5.9	260	6.6	6.8	17
200	508	160	406	120	305	311	7.9	347	8.8	9.0	23
250	635	200	508	150	381	389	9.9	434	11.0	11.3	29
300	762	240	610	180	457	468	11.9	-	-	13.5	34

The above numbers are approximate, and may be slightly different from the actual measurements.

SD210U Screen size chart (16:9 aspect ratio)

Screen				Distance from screen (L)				Height projected image (Hd)			
Diagonal size		Width (W)	Height (H)	Shortest (Wide)		Longest (Tele)					
inch	cm	inch	cm	inch	m	inch	m	inch	cm		
40	102	35	89	20	50	66	1.7	74	1.9	5.2	13
60	152	52	133	29	75	100	2.6	112	2.8	7.9	20
80	203	70	177	39	100	135	3.4	150	3.8	10.5	27
100	254	87	221	49	125	169	4.3	188	4.8	13.1	33
150	381	131	332	74	187	254	6.4	283	7.2	19.6	50
200	508	174	443	98	249	339	8.6	378	9.6	26.2	66
250	635	218	553	123	311	424	10.8	473	12.0	32.7	83
300	762	261	664	147	374	509	12.9	-	-	39.3	100

The above numbers are approximate, and may be slightly different from the actual measurements.

MITSUBISHI ELECTRIC AUSTRALIA

348 Victoria Rd Rydalmere, NSW 2116 Phone: (02) 9684 7777 Fax: (02) 9684 7208

To find out more about XD211U/SD210U and our projectors, visit us at

www.MitsubishiElectric.com.au