

**MULTIMEDIA DATA/VIDEO PROJECTORS**

# The More You Use It... The Clearer the Difference

The ideal assistant for educational environments



Excellent cost-performance and easy to use


# XD280U/XD250U



## Easy-to-manage Features

### Simultaneous Message Display → Visual PA

Using a control room computer equipped with projector-control software, simultaneously send messages (up to 350 characters long) in real-time to projectors connected to the LAN. Ideal for broadcasting important information to multiple rooms in the school or building.

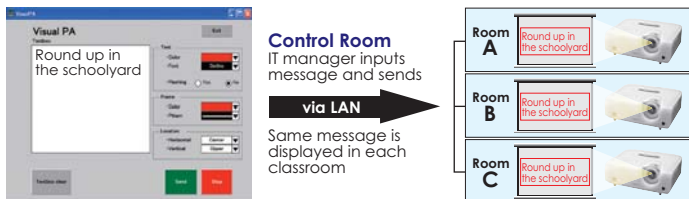


### All-in-one Management of Multiple Projectors → ProjectorView Global+

After installing ProjectorView Global+ (separately available software), the status of multiple projectors connected to a dedicated LAN in the same network can be viewed. Remote operation of the power switch (ON/OFF), image input switch and other functions are possible using the software.

### Low Operating Cost → Standby Mode under 1W\*1, 6,000hr\*2 Long-life Lamp, filter-free

An exceptionally long lamp life and low power usage in standby mode means a lower cost of ownership and less downtime for maintenance.

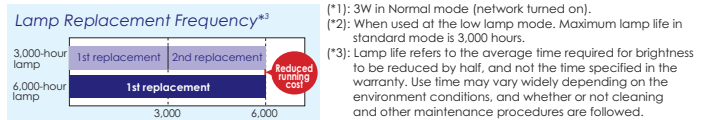

### Simple Lamp Replacement → Top-loading Lamp

The projection lamp is installed in the upper section of the main body. Regardless of whether sitting on a shelf or suspended from the ceiling, lamp replacement is simple and easy\*, and there's never a need to move the whole projector.



\* A special replacement lamp removal tool is included to prevent dropping the lamp during replacement.


### Enhanced Terminal group → HDMI, Dual PC Input

## Easy-to-use Functions

### Excellent Sound Projection → 10 Watt Speaker + Audio Mix

A high-volume, 10W speaker is built-in, eliminating the need for an external speaker. Using the "Audio Mix\*" feature and a wireless microphone, the presenter's voice is reproduced loud and clear in real time.

\*Only compatible with stereo mini-jack.  
Not compatible with RCA jack (L/R) or HDMI.



### Superior Colour Performance → New BrilliantColor™ Adopted

Mitsubishi Electric's original built-in colour wheel is incorporated for enhanced colour reproduction. Clear, vivid images are reproduced from computer and video-player signals.

### Vastly Improved Operability → Quick Menu

For improved operation ease, the tool bar has seven main menus and one custom menu. Switching to the sub-menu allows the selection of more specific operations.



### Quiet Fan Noise → Silent 28dB Operation (in low mode)

Whisper quiet performance for presentations free of distraction from the projector. That's the operating sound level promised by the XD280U/XD250U.




# XD280U XD250U

## MOBILE XGA PROJECTOR


- Brilliant Color™
- Color Enhancer
- Wall Screen
- 10W Speaker
- User Logo Projection
- Password Lock
- Instant Shutdown
- Long-life Lamp
- Low Standby Power
- Top/Side Loading Lamp
- LAN (RJ-45)
- HDMI
- Low Fan Noise
- Picture Performance Presentation
- User Friendly

### Input and Output Terminals

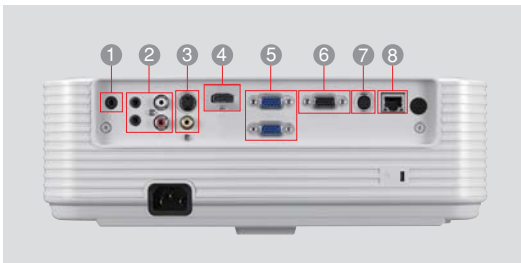

- 1 Audio output
- 2 Audio input
- 3 S-Video/Video
- 4 HDMI
- 5 PC/Component Video input
- 6 Monitor output
- 7 Serial RS-232C
- 8 LAN (RJ-45)

### Dimensions

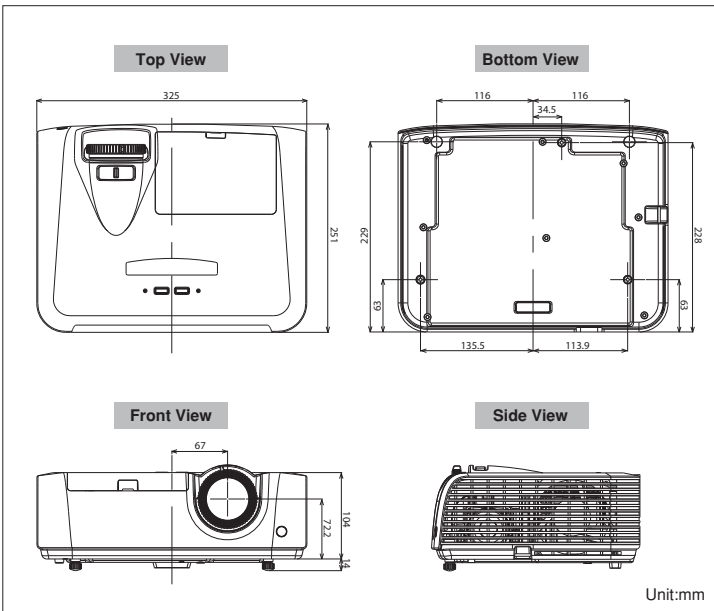


### Specifications

Model	XD280U	XD250U
Display Technology	0.55" 1-Chip DMD	
Resolution	1024 x 768 (Total 786,432 pixels)	
Brightness (Maximum)	3000lm	2700lm
Contrast Ratio	2000 : 1	
Picture Size	40" - 300"	
Throw Ratio	1.6 - 2.0	
Source Lamp**	190W (Shut-off Time 6000hr) with Low Mode, 230W (Shut-off Time 3000hr) with Standard Mode	
PC Compatibility	640 x 480 - 1280 x 1024, True : 1024 x 768, Sync on Green available	
Video Compatibility	NTSC / NTSC 4.43 / PAL (including PAL-M, N) / SECAM / PAL-60 Component Video ; 480i/p (525i/p), 576i/p (625i/p), 720p (750p), 1080i (1125i 60Hz), 1080i (1125i 50Hz)	
Input Terminals	RGB ; mini D-sub 15pin x 2 Video ; RCA x 1, S-VIDEO x 1 Digital ; HDMI x 1 Audio ; Stereo mini jack (ø3.5mm) x 2, RCA jack (L/R) x 1	
Output Terminals	RGB ; mini D-sub 15pin x 1 Audio ; Stereo mini jack (ø3.5mm) x 1	
Communication Terminal	RS-232C ; mini DIN 8pin x 1, LAN ; RJ-45 x 1	
Audio Speaker	10W Mono	
Dimensions (W x H x D)	325 x 118 x 251 mm / 12.6 x 4.1 x 9.3 inch	
Weight	3.3kg / 7.3lbs	
Power Requirements	AC 100-240V, 50/60Hz	
Optional Lamp	VLT-XD280LP	

• Compliance with ISO21118-2005  
 • All brand names and product names are trademarks, registered trademarks or trade names of their respective holders.  
 \*\*Approximate figure based on average operational life cycle.

### Screen size and Projection distance

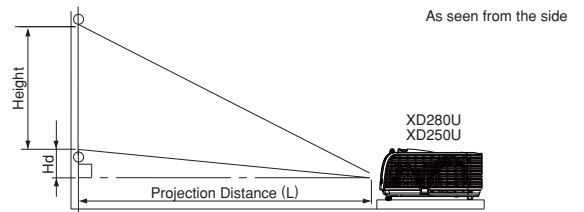

#### Screen size chart (4:3 aspect ratio)

Diagonal Size	Screen				Distance from screen (L)				Height projected image (Hd)		
	Width (W)		Height (H)		Max. Zoom		Min. Zoom		inch	cm	
40	102	32	81	24	61	51	1.3	62	1.6	3.6	9
60	152	48	122	36	91	77	2.0	94	2.4	5.4	14
80	203	64	163	48	122	103	2.6	125	3.2	7.2	18
100	254	80	203	60	152	129	3.3	157	4.0	9.0	23
150	381	120	305	90	229	195	4.9	236	6.0	13.4	34
200	508	160	406	120	305	260	6.6	315	8.0	17.9	45
250	635	200	508	150	381	326	8.3	394	10.0	22.4	57
300	762	240	610	180	457	391	9.9	-	-	26.9	68

The above numbers are approximate, and may be slightly different from the actual measurements.

#### Screen size chart (16:9 aspect ratio)

Diagonal Size	Screen				Distance from screen (L)				Height projected image (Hd)		
	Width (W)		Height (H)		Max. Zoom		Min. Zoom		inch	cm	
40	102	35	89	20	50	56	1.4	68	1.7	7.2	18
60	152	52	133	29	75	84	2.1	102	2.6	10.8	27
80	203	70	177	39	100	113	2.9	137	3.5	14.3	36
100	254	87	221	49	125	141	3.6	171	4.4	17.9	46
150	381	131	332	74	187	213	5.4	258	6.5	26.9	68
200	508	174	443	98	249	284	7.2	344	8.7	35.9	91
250	635	218	553	123	311	356	9.0	430	10.9	44.8	114
300	762	261	664	147	374	427	10.8	-	-	53.8	137

The above numbers are approximate, and may be slightly different from the actual measurements.



348 Victoria Rd Rydalmere, NSW 2116 Phone: (02) 9684 7777 Fax: (02) 9684 7208

To find out more about XD280U/XD250U and our projectors, visit us at

[www.MitsubishiElectric.com.au](http://www.MitsubishiElectric.com.au)