


AP Series

Reverse Cycle Split
System Air Conditioner

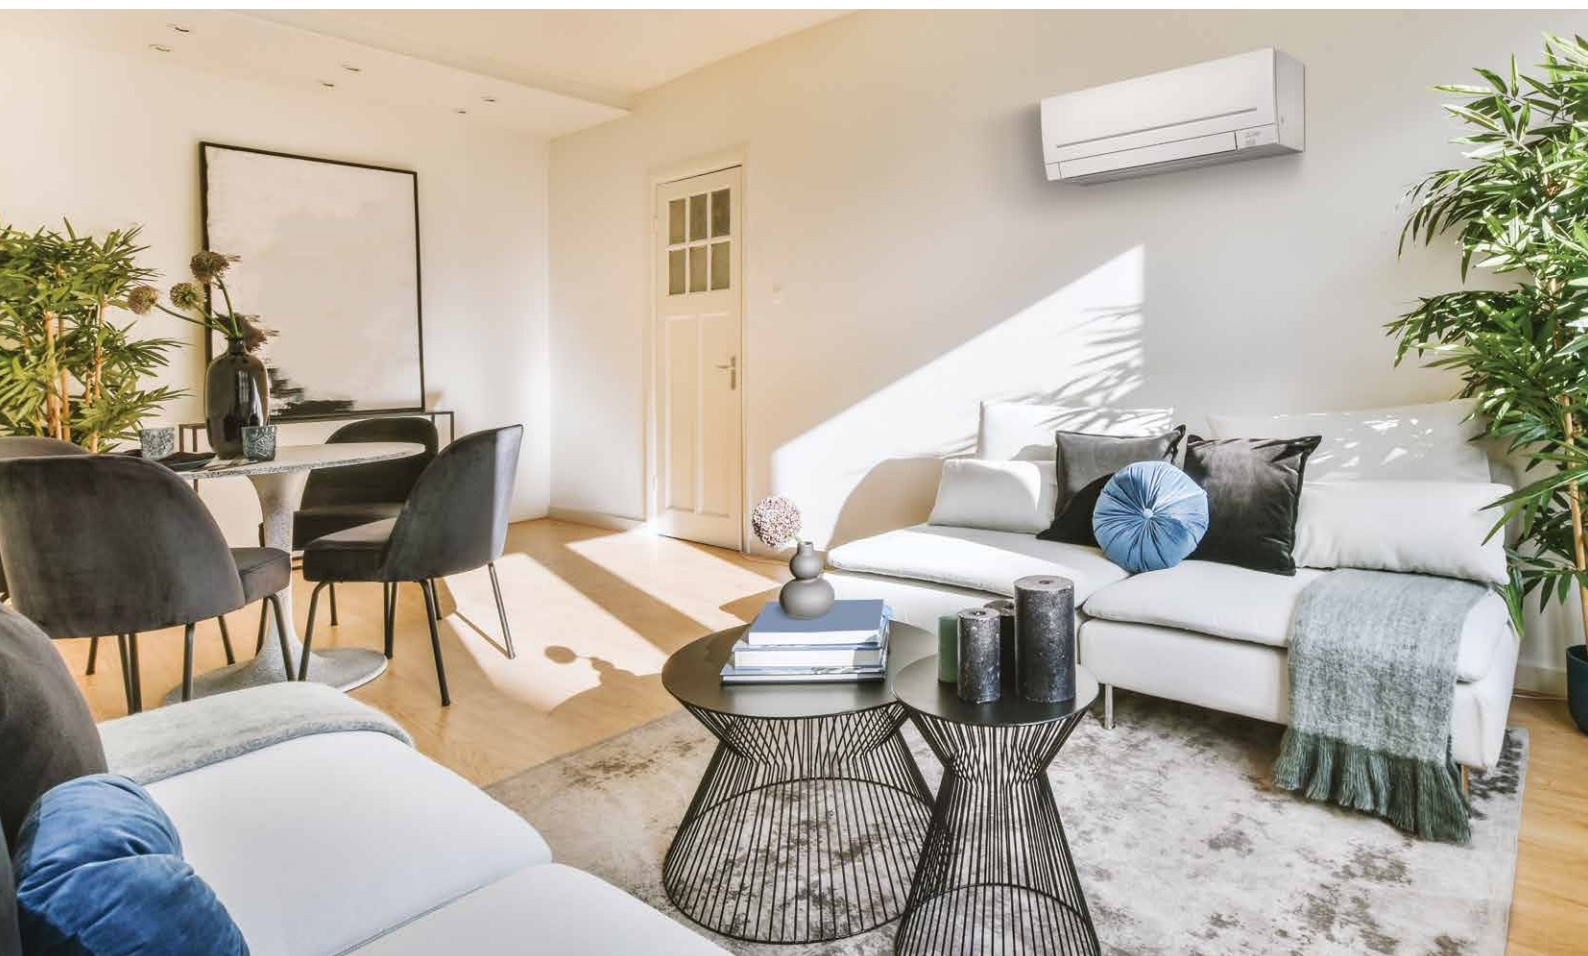

Scan for more
information or call
1300 722 228

A Life More Electric

MSZ-AP Series

The MSZ-AP Series is engineered for high performance and lower operating noise, with a streamlined design that blends seamlessly with your décor.



Built-In Wi-Fi Control^{*1*2}

Unlock the door to smarter heating and cooling systems, for total home comfort. Connecting your compatible Mitsubishi Electric air conditioner to your smartphone, tablet or online account, gives you the freedom to control each unit on-the-go via an internet connection from anywhere in the world.



Dual Barrier Coating

The advanced Dual Barrier Coating on the heat exchanger and inner surfaces reduce dust and greasy dirt from adhering to it. This not only helps the unit stay cleaner for longer but also makes cleaning the unit easier.



Vertical & Horizontal Vanes^{*2}

Large vertical and horizontal vanes provide flexible airflow control, allowing you to direct air where it's needed most for enhanced comfort throughout the room. Easily adjust these settings at the touch of a button on your remote controller.



Quiet Operation

With the MSZ-AP25, the "Quiet Mode" fan speed setting ensures quiet operation, as low as 18dB(A) on heating mode; it's so quiet you'll check to see if it's on.^{*3}

Indoor Unit			MSZ-AP20VGD2	MSZ-AP25VGKD2	MSZ-AP35VGKD2	MSZ-AP42VGKD2	MSZ-AP50VGKD2	MSZ-AP60VGKD2	MSZ-AP71VGKD2	MSZ-AP80VGKD2
Outdoor Unit			MUZ-AP20VGD2	MUZ-AP25VGD2	MUZ-AP35VGD2	MUZ-AP42VGD2	MUZ-AP50VGD2	MUZ-AP60VGD2	MUZ-AP71VGD2	MUZ-AP80VGD2
Cooling	Capacity [Min - Rated ^{*4} - Max]	kW	0.6 - 2.0 - 2.7	1.1 - 2.5 - 3.6	1.1 - 3.5 - 4.1	0.9 - 4.2 - 4.8	1.4 - 5.0 - 6.2	1.4 - 6.0 - 7.3	2.0 - 7.1 - 8.7	2.0 - 7.8 - 9.2
	Total Input [Min - Rated ^{*4} - Max]	kW	0.23 - 0.46 - 1.16	0.21 - 0.50 - 0.99	0.21 - 0.87 - 1.18	0.15 - 1.19 - 1.90	0.30 - 1.32 - 2.23	0.24 - 1.59 - 2.35	0.43 - 2.01 - 3.03	0.43 - 2.36 - 3.20
	ZERL Star Rating ^{*5} (Residential)	Hot/Average/Cold	4.5 / 4 / 4.5	6 / 5.5 / 6	5 / 4.5 / 5	4 / 4 / 4	4.5 / 4 / 4.5	4.5 / 4 / 4.5	3.5 / 3 / 3.5	3.5 / 3 / 3.5
Heating	Capacity [Min - Rated ^{*4} - Max]	kW	0.5 - 2.5 - 3.5	1.3 - 3.2 - 5.0	1.3 - 3.7 - 5.1	1.3 - 5.4 - 6.0	1.4 - 6.0 - 8.0	2.0 - 6.8 - 8.6	2.2 - 8.0 - 9.9	2.2 - 9.0 - 11.0
	Total Input [Min - Rated ^{*4} - Max]	kW	0.25 - 0.60 - 1.20	0.35 - 0.67 - 1.40	0.35 - 0.82 - 1.42	0.26 - 1.43 - 1.90	0.30 - 1.62 - 3.00	0.30 - 1.65 - 2.60	0.42 - 2.09 - 3.25	0.42 - 2.55 - 3.65
	ZERL Star Rating ^{*5} (Residential)	Hot/Average/Cold	3 / 2.5 / 2	3.5 / 3 / 3	4 / 3.5 / 3	3.5 / 2.5 / 2	3.5 / 2.5 / 2	3 / 2.5 / 2.5	3 / 2.5 / 2	3 / 2.5 / 2
Air Volume	Min-Max [Cool/Heat] (Fan Speeds)	L/s	58 - 115 / 62 - 122 (5)	82 - 205 / 82 - 190 (5)	82 - 223 / 82 - 215 (5)	90 - 223 / 88 - 233 (5)	100 - 258 / 93 - 268 (5)	157 - 315 / 180 - 338 (5)	160 - 310 / 170 - 320 (5)	160 - 342 / 170 - 320 (5)
Sound Pressure Level ^{*6}	Indoor Min - Max [Cool/Heat]	dBA	21 - 42 / 21 - 42	19 - 44 / 18 - 42	19 - 45 / 19 - 45	26 - 46 / 26 - 46	28 - 49 / 28 - 48	28 - 48 / 30 - 48	30 - 49 / 30 - 51	30 - 53 / 30 - 51
	Out (PWL) [Cooling/Heating]	dBA	47 (59) / 48 (61)	46 (59) / 49 (59)	50 (64) / 50 (64)	51 (65) / 52 (65)	54 (69) / 56 (69)	56 (69) / 57 (69)	56 (69) / 55 (69)	56 (69) / 55 (69)
Dimensions	Indoor [HxWxD]	mm	250 x 760 x 178	299 x 798 x 219	299 x 798 x 219	299 x 798 x 219	299 x 798 x 219	325 x 1100 x 257	325 x 1100 x 257	325 x 1100 x 257
	Outdoor [HxWxD]	mm	550 x 800 x 285	550 x 800 x 285	550 x 800 x 285	550 x 800 x 285	714 x 800 x 285	714 x 800 x 285	880 x 840 x 330	880 x 840 x 330

For full specifications, please see the QR code on the front of the flyer.

*1 Account and Internet Connection Required.

*2 Excludes MSZ-AP20.

*3 Tested in an anechoic chamber according to EN 12102-1:2017.

*4 The Capacity (rated), Total Input (rated) and Running Current (rated) are determined under conditions T1 (cooling) or H1 (heating) of AS/NZS 3823.1.1

Cooling: Indoor 27°CDB/19°CWB, Outdoor 35°CDB/24°CWB

Heating: Indoor 20°CDB/15°CWB, Outdoor 7°CDB/6°CWB

*5 ZERL (Residential) refers to 'Zoned Energy Rating Label' residential star rating based on GEMS 2019 Determination.

*6 Tested in an anechoic chamber according to EN 12102-1:2017.



MUZ-AP20VGD2
MUZ-AP25/35/42VGD2

MUZ-AP50VGD2
MUZ-AP60VGD2

MUZ-AP71/
80VGD2