


MODEL

PZ-15RF3-E, PZ-25RF3-E, PZ-35RF3-E, PZ-50RF3-E,
PZ-65RF3-E, PZ-80RF3-E, PZ-100RF3-E

SIGN

■ Dimensions, materials and applicable model

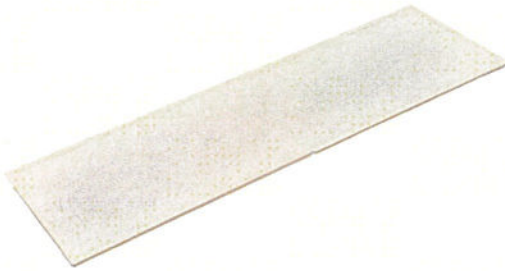

Material

Non-woven fabric filter

| Filter model | | | | | Applicable Lossnay model |
|--------------|-----------|-----------------|-------|-----------|------------------------------|
| Model name | Piece/set | Dimensions (mm) | | | |
| | | Length | Width | Thickness | |
| PZ-15RF3-E | 2 | 549 | 125 | 20 | LGH-15RVX3-E |
| PZ-25RF3-E | 2 | 654 | 151 | 15 | LGH-25RVX3-E |
| PZ-35RF3-E | 2 | 784 | 178 | 15 | LGH-35RVX3-E |
| PZ-50RF3-E | 2 | 926 | 178 | 15 | LGH-50RVX3-E |
| PZ-65RF3-E | 2 | 852 | 213 | 15 | LGH-65RVX3-E |
| PZ-80RF3-E | 2 | 890 | 238 | 15 | LGH-80RVX3-E, LGH-160RVX3-E |
| PZ-100RF3-E | 2 | 1117 | 238 | 15 | LGH-100RVX3-E, LGH-200RVX3-E |

■ Filtration specifications

Filtration specifications are results of tests conducted by third-party and are not guaranteed values.

- ISO16890-2016: Coarse 60%

■ Attention

This filter is required to clean on a regular basis.

- Clean the air filters once a year.
- Replacement interval: Around 5 years with maintenance at stated periods.
- Proper replacing interval depends on the air condition of Lossnay unit intake.

※Specifications may be subject to change without notices.

| SPECIFICATIONS | DATE | TYPE MODEL | Replacement Filter PZ-15RF3-E, PZ-25RF3-E, PZ-35RF3-E, PZ-50RF3-E, PZ-65RF3-E, PZ-80RF3-E, PZ-100RF3-E |
|--|-------------|--------------------|--|
| | 15-Feb-2023 | | |
| MITSUBISHI ELECTRIC CORPORATION | NUMBER | N22HHGU0019 | 1/1 |