


Entry Level HMI

GT23

PRODUCT FLYER



The Mitsubishi Electric GT23 Series of graphic operator terminals are full of outstanding features you wouldn't expect to find in an entry level screen. Simple and sleek design concept with long life cycle components, GT23 Series provide TFT LCD display with 65K colours, VGA resolution and 9 MB of internal memory. All GT23's can be programmed with GT Works 3 engineering software, which allows users to configure and build modern applications with simple configuration.

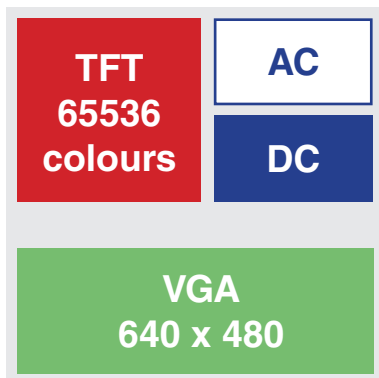


65K Colour TFT LCD Display

65K colour TFT LCD display with VGA resolution available in the following screen sizes: 8.4" and 10.4".



In-built Communications

Communication interfaces such as Ethernet, RS-422/485, RS-232, USB host/device and SD memory card are standard features.

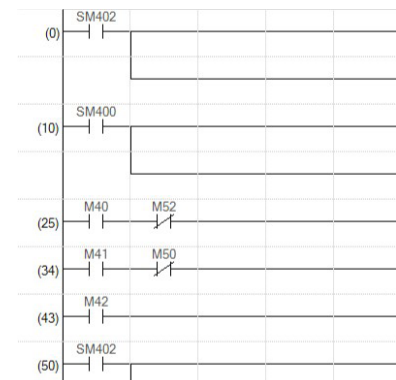

Advanced Functionality

Advanced features such as data logging, multi-channel communication and FA transparent function are supported.

Features

- » GT Works3 user-friendly programming software
- » FTP server/client
- » Operation log
- » Data logging
- » Multi-channel
- » Transparent function
- » Operator authentication
- » Backup/restore
- » MELSEC-FX list editor
- » System alarm function
- » GOT screen templates

SPECIFICATIONS

Specifications		GT2308-VTBA	GT2308-VTBD	GT2310-VTBA	GT2310-VTBD
Display unit	Type	8.4", TFT, LCD, 65536 colours		10.4", TFT, LCD, 65536 colours	
	Resolution (pixel)	640 x 480			
Power supply		100 - 240 V AC	24 V DC	100 - 240 V AC	24 V DC
Memory capacity	(ROM)	9 MB			
	(RAM)	9 MB			
Memory card		1 (SD memory card)			
Keyboard type		Touch-panel			
Function keys		Touch keys			
LED indicators		1 (power)			
Interfaces		Ethernet (TCP/IP), RS232, RS422/485, USB, SD card slot			
Real-time clock		Intergrated			
Network communication possibilities		Ethernet (TCP/IP), RS232, RS422/485			
IP rating (front)		IP67*			
Dimensions (WxHxD)	mm	241 x 194 x 56		303 x 218 x 56	
Weight	kg	1.5		1.9	

Notes:

*The unit may not be used in certain environments where it is subjected to splashing oil or chemicals for a long period of time or soaked in oil mist.
Accessories: Programming software GT Works3, cables and interface adapters.


Catalogue

<https://bit.ly/GOT-Series>

e-Learning

<https://www.mitsubishielectric.com/fa/assist/e-learning/eng.html>

For further information contact

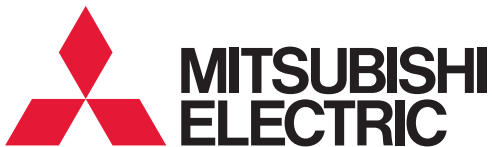

Email: iasw@meaust.meap.com
Website: MitsubishiElectric.com.au